



Universal Superfit Bar Carrier INSTRUCTIONS

RCB-3745 TRCB-4460



* Please verify all parts are present before continuing.

Parts List

-  4 Lock Nuts
-  4 Bolts
-  4 End Caps
-  4 Hooks
-  4 Feet
-  4 Foot Pads
-  4 Straps



For Both Models: 2 Carrier Bars



For Model TRCB-4460: 2 Telescope Bars

Assembly

Step 1.
Feed a tie strap into each foot with the buckle-end of the strap on top. Please note that you may find it necessary to push the strap through from inside the foot as shown in figure #1b.

Figure 1a.

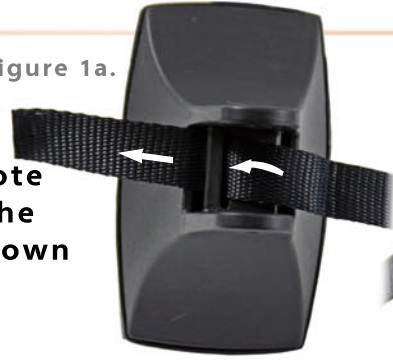


Figure 1b.




Figure 2.

Step 2.
Place a protective foot pad on the bottom of each foot.

Step 3.
Slide a mounting hook onto the bottom part of each strap.



Figure 3.

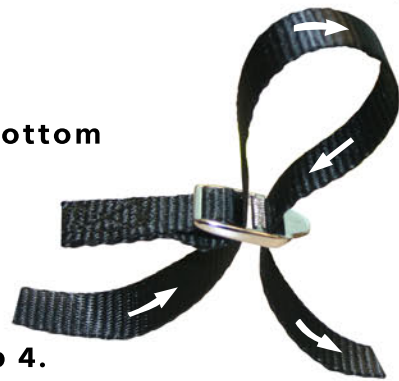

Step 4.
Loop the strap through the buckle.

Figure 4.

Step 5.
Tap the end caps onto the carrier bar.



Figure 5.

Step 6.
Position each foot with the strap facing outward and secure the carrier bar using a bolt and lock nut.



Figure 6.

For Telescoping Models (TRCB-4460)
You will also need to bolt the carrier bar to the telescoping bar.



Figure 7.

Installation




Ensure the vehicle roof is free of debris and position the bar carrier aligned with the doors.

Place the hook inside the vehicle door and tighten the strap to secure firmly in place.

How to Properly Tie-Down Roof Cargo

To prevent damage to the vehicle and/or cargo, as well as overcome updraft concerns, it is absolutely imperative to tie-down the cargo extending past the vehicle windshield and rear window. A bow tie-down strap is designed to properly secure cargo to the front vehicle bumper undercarriage. The front strap counteracts air updraft forces preventing cargo from flying upward or off the vehicle during travel. To balance the roof cargo load a stern tie-down strap is also required which connects the cargo to the rear bumper undercarriage.

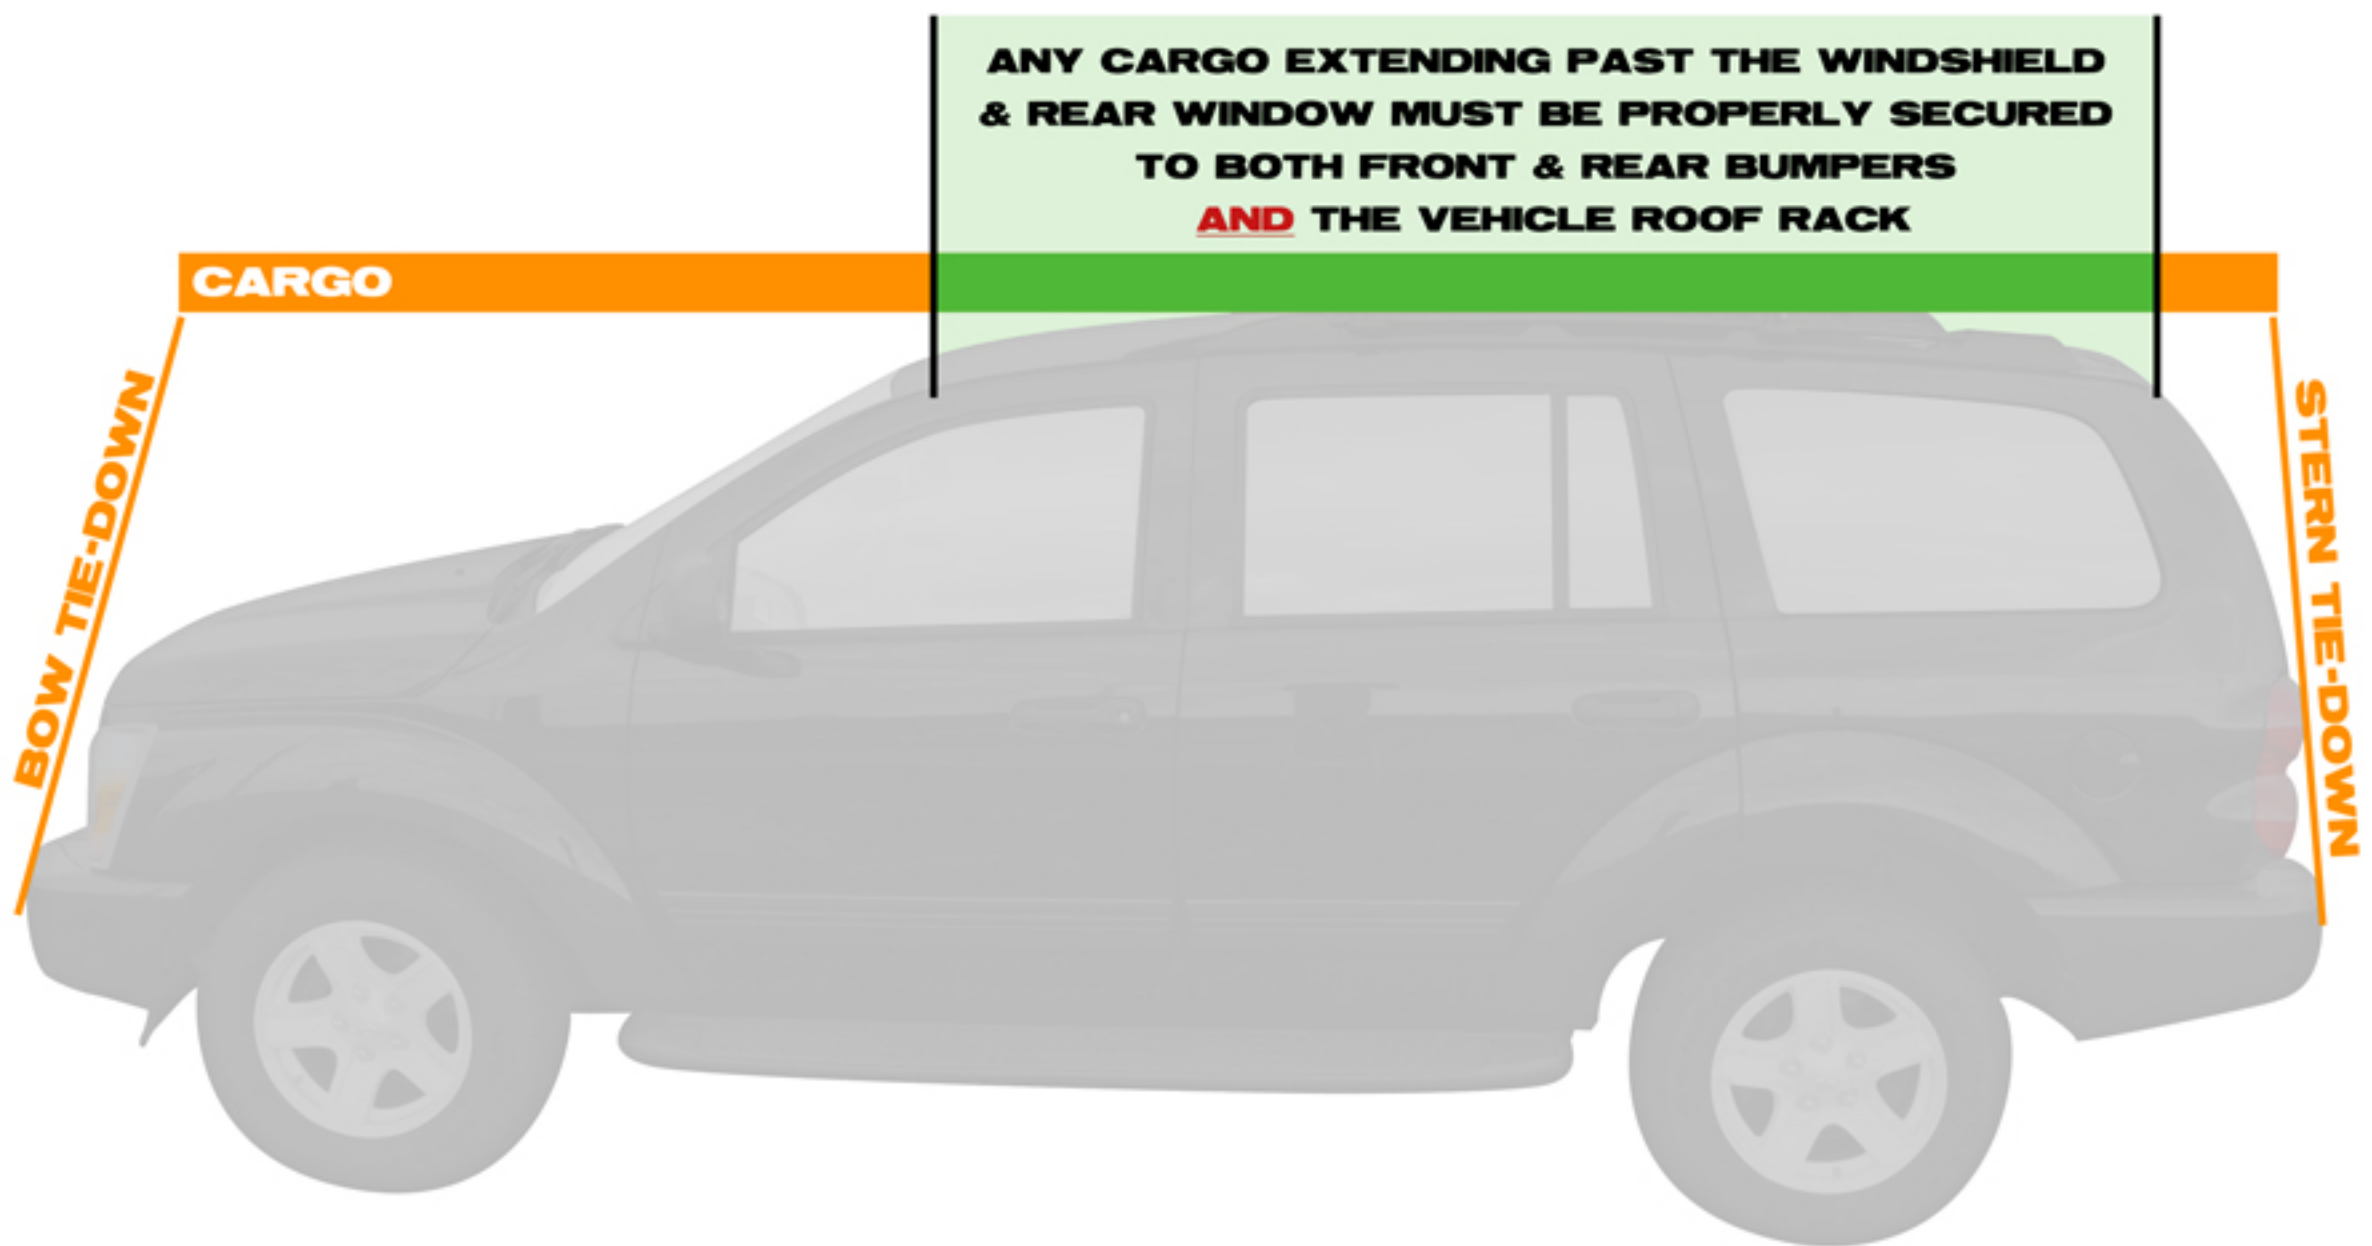

Important Safety Precautions:

- Ensure cargo stored on a vehicle roof does not obstruct driver viewing through the windshield or rearview mirror
- Do not transport any cargo wider than the vehicle roof
- Tie-down longer cargo with a bow and stern strap
- Attach bow and stern straps to a solid tie-down point, do not hook to plastic or flimsy bumpers
- Secure roof cargo to the roof rack and side rails
- Check all tie-down connections periodically on travel stops
- Use a cargo net to tie-down all small or loose articles stored on a roof rack