


TELESCOPING BAR CARRIER INSTRUCTIONS

PART # TRCB-4460

PARTS LIST:

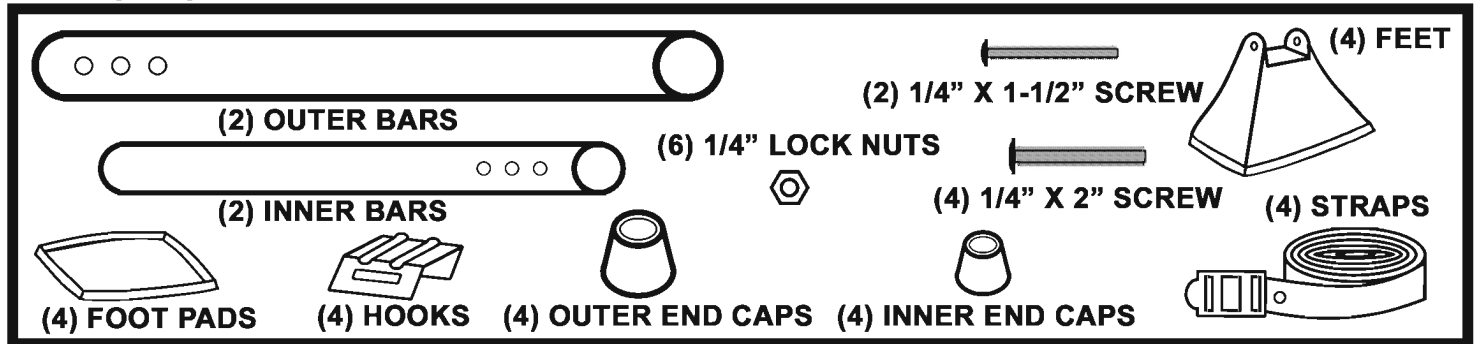

PLEASE VERIFY ALL PARTS ARE PRESENT BEFORE CONTINUING

ASSEMBLY:

The telescoping bar carrier adjusts from 60", 55", 50" or 45" in length. Determine the best length before continuing.

STEP 1. Determine the proper bar length & slide the inner bar into the outer bar and secure using the 1/4" x 1-1/2" screw and lock nut.

STEP 2. Secure a foot to both ends of the carrier bar using a 1/4" x 2" screw & lock nut.

STEP 3. Tap on an end cap at each end of the carrier bar.

STEP 4. Select a hook and attach it to one of the feet with the adjustable strap. Properly secure the strap so it tightens.

MOUNTING:




STEP 1. Set the carrier bar onto the vehicle roof. Make sure the bar is centered on the vehicle and each foot is as far apart as possible.

STEP 2. Put a foot pad on the bottom of each foot and ensure the roof top is cleaned to ensure no property damage.

STEP 3. Open both vehicle doors and secure the hooks into where the roof is connected to the inner door frame (not the actual door). Keep the carrier centered as you alternately tighten the straps. Check to see that the hooks do not hinder the door closing. Secure the ends of the straps. *(Vehicles with exposed rain gutters see below)*

STEP 4. During travel, stop and check the strap & hardware tightness.

VEHICLES WITH EXPOSED RAIN GUTTERS: Secure the bar carrier to your roof by installing the hooks into the vehicle's rain gutters. Keep the carrier centered as you alternately tighten the straps. Secure the ends of the straps.

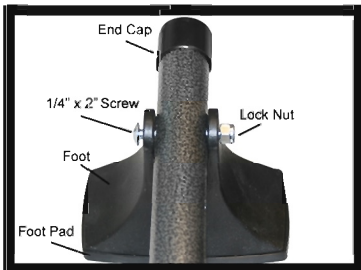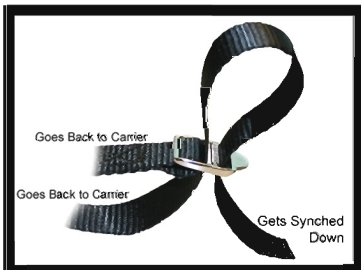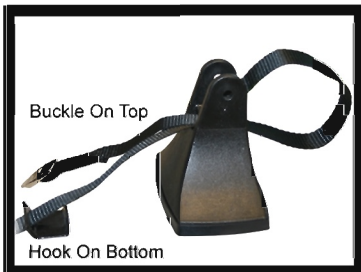

RAGE Powersport Products - 575 W. High Street - Aurora, MD 65605
Toll Free (800)-851-6396